

Expressions 570 Pumped Electric Showers



The Range

The Expressions 570 provides the convenience of electric showering in areas where no mains water or low water pressure prevents the use of normal electric instant showers. By combining a standard electric shower and booster pump, this shower can simply be connected to a cold water header tank.

Power Output



Approvals



Guarantee




Key Features


- Instant electric shower with integral pump to ensure constant water flow
- Overheat protection
- Full set of accessories including premium wide spray multi-mode handset
- High and low power selection
- Polar white finish
- Rotary control for temperature/flow selection
- Power on and overheat neon indicators
- Ideal for installations where water pressure is insufficient for an instant shower
- Cold water cistern fed (not mains)

Technical

Dimensions

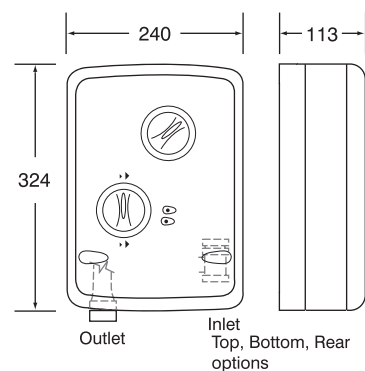

Installation Expressions 570 Range

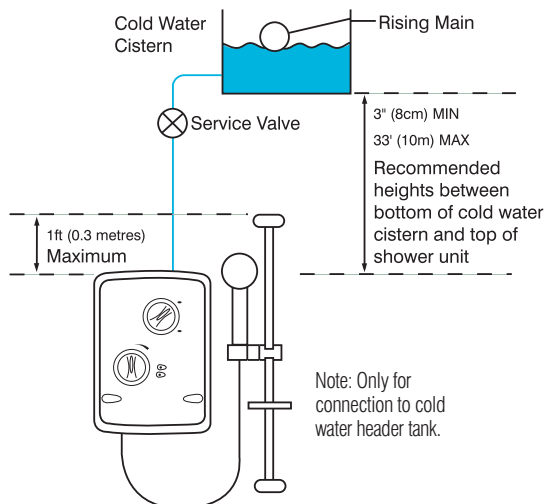

Product Selector

For full range of accessories see page 26/27

Product Reference	Short Code	Catalogue Number	Heat Setting (kW)	kW Loading @ 230-240V	Recommended Cable Size	Recommended Fuse Rating
Expressions 570 8.5	EXP5708	24555515	4.8 or 8.5	7.8 - 8.5	6 / 10mm ²	40-45 amps
Expressions 570 9.5	EXP5709	24556015	5.0 or 9.5	8.7 - 9.5	6 / 10mm ²	45 amps

• Cold water cistern fed • Operating water pressure: 3" minimum head to 33' maximum head (0.08m to 10m) • Top, bottom and rear water and cable entry options • Fixing pack and instructions supplied • 15mm push-fit fitting for cold water inlet connection • The unit incorporates a 240V AC motor to boost flow • Maximum flow rate: 7.0 litres/min.