



Sunfan SFC

Compact, Domestic, Downflow Electric Fan Heaters

Fast response downflow heaters offer a low cost solution for rapid heating on demand. Mounted at high level, they offer an ideal solution where lower wall space is limited in bathrooms, shower rooms, kitchens, conservatories and outbuildings.

Application Low cost, rapid heating on demand for small rooms.

Key Features Three model range | 1kW constant heat | 2kW auto step back to 1kW | 2kW with rotary variable thermostat | Pullcord operated | Power on neon indicator | Two integral safety devices | 1 metre fitted cable | Supplied complete with instructions and fittings | IPX2 rated.


Safety Features Dual thermal cut-out protection | Class II (double insulated).

Materials High temperature plastic body and grille.

Approvals BEAB Approved | CE.

Guarantee 1 year product guarantee (UK).

Dimensions

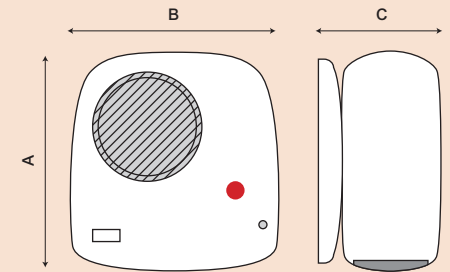

● Cable Fitted

Technical Specification High temperature plastic body and grille | Stitched 'black heat' element | Thermal cut-out | Secondary thermal overheat protection | Mechanical bi-metal thermostat (SFC2T only) | Fitted mains cable | Supplied with brackets and fixings.

Heater variant	Rating @ 230-240V	Dimensions (mm)			Weight (kg)
		A Height	B Width	C Depth	
SFC1	1kW	240	235	135	1.45
SFC2T	2kW	240	235	135	1.45
SFC2A	2kW	240	235	135	1.45

Product Range

Product Reference	Short Code	Cat. No
Sunfan SFC 1kW Fixed Output	SFC1	75771035
Sunfan SFC 2kW Variable Thermostat	SFC2T	75771036
Sunfan SFC 2kW Auto Step Back to 1kW	SFC2A	75771037

1 kW

2 kW

1yr GUARANTEE

BEAB Approved

CE