

Lo-Carbon Minivent

Ducted Bath/Shower Fan Kit



Features and Benefits

- **IP44** rated.
- Powerful axial in-line fan with downstream airflow guide vanes.
- Complete kit supplied.
- Meets Building Regulation Requirements for toilets and bathrooms.
- Adjustable timer version available.
- 2 speeds selectable at installation
- 5 Year Guarantee on the motor.

Powerful Lo-Carbon In-Line Fan Kit

The Vent-Axia Lo-Carbon Minivent ducted bath/shower kit includes all the components necessary to install a ducted 100mm system in one box. This simplifies fitting of an efficient ventilation system to small rooms, including bath, shower rooms and toilets. It is especially suitable for en-suite bathrooms.

When installed the fan kit has ample performance **to meet the Building Regulations Requirements** for toilets and bathrooms. The timer version should be used for internal rooms.

The kit consists of a Lo-Carbon Minivent **IP44** In-Line fan, a white ceiling grille and spigot, 3 metres of flexible duct and an external louvre for soffit or wall mounting. The duct should be cut to the required length and the bend radius kept to a maximum to provide the best fan performance.

Enclosed terminal compartment, Class 2 appliance.

Supply voltage 220-240/1/50Hz.

Models

DOM

Lo-Carbon Minivent Shower Fan - Basic

Comprises - high output tube fan, 3 metres of flexible duct, ceiling inlet grille and spigot, soffit/wall outlet grille.

Stock Ref

441421

DOM




Lo-Carbon Minivent Shower Fan - Timer

Comprises - high output tube fan, 3 metres of flexible duct, ceiling inlet grille and spigot, soffit/wall outlet grille.

Stock Ref

441422

Lo-Carbon Minivent Shower Kit installed

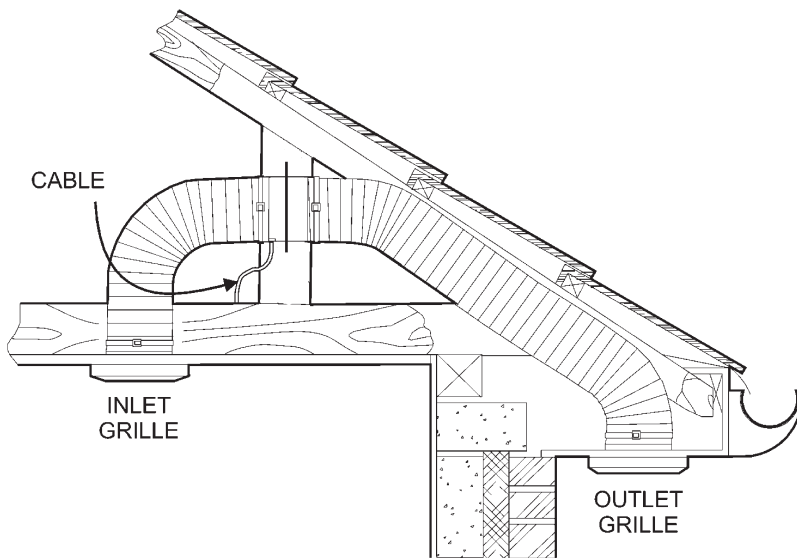

Performance

Model	Extract performance - FID			Sound dB(A) @ 3m
	m ³ /h	l/s	Watts	
Lo-Carbon Minivent B	110	31	6.5	23
Lo-Carbon Minivent T	110	31	6.5	23

Dimensions (mm)

A	BØ	C
80	98	138

WWW.
DEALEC
.COM

13-15 Priory Gate Road
Tel: 01304 215 575

DOVER Kent CT17 9SA
email: info@dealec.co.uk