

# Lo-Carbon Axial Bathroom/Toilet Fans Silhouette® 100 SELV



## Features and Benefits

- Models Basic/Timer/Humidity - Installation options.
- SELV Transformer to BS EN 60742
- Fully opening and closing shutters - Improved insulation
- Non transparent shutters - Enhanced privacy
- 2 speeds selectable at installation
- Blue neon power indicator - Modern aesthetics
- Vertical or Horizontal Mounting - Installation options
- Unique humidity sensor track - Improved response
- Extremely low sound levels.
- **IPX7** rated.
- 5 Year Guarantee on the motor.

## Slimline Bathroom Ventilation

With a slim profile of only 17mm, Silhouette blends in with the wall surface to provide an unobtrusive installation. Silhouette has a FID performance of 95m<sup>3</sup>/h. Silhouette can be ceiling/panel mounted and connected to an appropriate duct run to the outside.

Safety Extra Low Voltage (SELV) Designed for areas where a fan has to be fitted within zone 1 in a room containing a fixed bath or shower according to IEE wiring regulations. The New Silhouette SELV can be safely installed within the spray area. The fan is rated IPX7 control is by a mains safety isolating transformer with 12V DC SELV output, which is sited away from any source of spray and out of reach of a person using fixed bath or shower.



17mm actual profile



Backdraught prevention vanes fitted on discharge

## Models

Lo-Carbon Silhouette 100SVB - **DOM**  
100mm, bathroom/toilet fan with neon running light and backdraught shutter.

**Stock Ref** **441511** **£ Trade** **82.68**

Lo-Carbon Silhouette 100SVT - **DOM**  
100mm bathroom/toilet fan with adjustable electronic overrun timer (up to 30 mins), in the transformer neon running light which operates whenever the fan is on and backdraught shutter.

**Stock Ref** **441512** **£ Trade** **100.70**

Lo-Carbon Silhouette 100SVH - **DOM**  
100mm bathroom/toilet fan with remote adjustable auto humidity sensor from 60-90% RH, neon running light which operates whenever the fan is on and backdraught shutter.

**Stock Ref** **441513** **£ Trade** **135.68**


## Dimensions (mm)

A	BØ	C	D	E	F
160	99	77	90	200	32


Transformer (WXHXD) 87X87X83

Weight 0.6kg

Panel

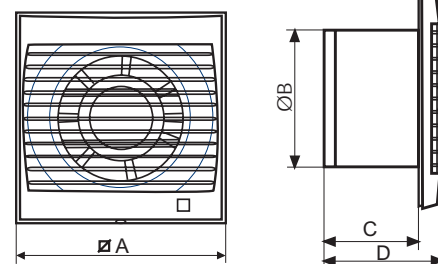

Wall Kit (see page 135)

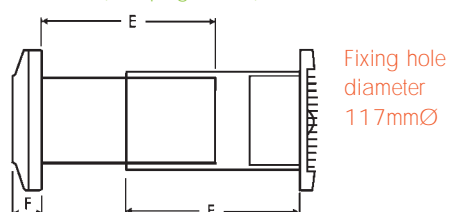

## Performance

Toilet	Extract performance		Watts	Sound dB(A) @ 3m	Shutter
	m3/h	l/s			
Lo-Carbon Silhouette 100 SVB	55	15	3.5	26	Spring
Lo-Carbon Silhouette 100 SVT	55	15	3.5	26	Spring
Lo-Carbon Silhouette 100 SVH	55	15	3.5	26	Spring

Bathroom	Extract performance		Watts	Sound dB(A) @ 3m	Shutter
	m3/h	l/s			
Lo-Carbon Silhouette 100 SVB	95	26	7.5	32	Spring
Lo-Carbon Silhouette 100 SVT	95	26	7.5	32	Spring
Lo-Carbon Silhouette 100 SVH	95	26	7.5	32	Spring

call for availability

**WWW.**  
**DEALEC**  
**.COM**

13-15 Priory Gate Road  
Tel: 01304 215 575

DOVER Kent CT17 9SA  
email: [info@dealec.co.uk](mailto:info@dealec.co.uk)