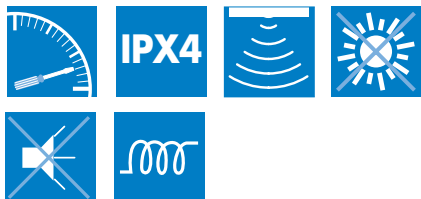


REINFORCED

The outer structure is made of melamine, a thermally hardened resin with a very high resistance that makes the products very reliable and ideal for use in washrooms in public houses, restaurants and hotels.

They are designed to withstand harsh impact, are scratchproof and are not damaged by cigarette burns. The range comprises hand dryers and soap dispensers operated by infra-red sensors.



NEW

Optimal Dry R A

Automatic hand dryer with reinforced casing

VORTICE AUTOMATIC HAND DRYERS

- Easier installation and maintenance.
- Electrically insulated splashproof IPX4.
- UV resistant ABS plastic.
- New Printed Circuit board.
- Dust filter.
- Particularly quiet.
- Maximum safety.
- Automatic start-up.

	NEW
	Optimal Dry R A automatic hand dryer with reinforced casing
Code	19227
Hz	50/60
Voltage	220-240
Watt	2000
Watt (motor)	65
Rated current (A)	9
Air flow (m ³ /h)	170
Approvals	
Weight (Kg)	3.2
Insulation	cl.II
Protection	IPX4
IK	9
Noise Level (at 1 m) dB(A)	61.4

**UNIQUE
ASYMMETRICAL
DESIGN**



Design: F.Trabucco & Associati



VORTICE AUTOMATIC SOAP DISPENSER

- Indicator light.
- Easy to open for maintenance.
- Peristaltic pump.
- Adjustable dispense quantity.
- Adjustable sensor.
- Maximum safety.



Design: F.Trabucco - M.Vecchi







AHDR

Reinforced automatic hand dryer



ASDR

Reinforced automatic soap dispenser

	AHDR		ASDR
	reinforced automatic hand-dryer with infrared sensor		reinforced automatic soap dispenser with infrared sensor
Code	19206	19211	19306
Hz	50/60	60	50
Voltage	220-240	110-120	220-240
Watt	2000	1400	18
Watt (motor)	65	90	-
Soap container capacity (l)	-		2.6
Rated current (A)	9	12.5	-
Air flow (m ³ /h)	150		-
Approvals			
Weight (Kg)	3.4		2
Insulation	 cl.II		 cl.II
Protection	IPX4		IP24
IK	9		-
Noise Level (at 1 m) dB(A)	60.3		-